

# ELASTOFLEX S6 G (180) MOP

## SBS (ELASTOMERIC) GRANULATED CAP SHEET

### PRODUCT DESCRIPTION

Elastoflex S6 G is a superior SBS (Styrene-Butadiene-Styrene) modified bitumen roofing membrane reinforced with a non-woven polyester mat that provides flexibility and dimensional stability as well as excellent tear and puncture resistance. The proprietary SBS compound offers superb waterproofing and weathering physical properties. Elastoflex S6 G is designed for use as cap sheet in multilayer low-slope assemblies.

Elastoflex S6 G has a granular top surface in multiple color options and a sand bottom surface for hot asphalt or cold adhesive application methods.

Elastoflex S6 G membrane can be used as part of a Polyglass warranted multi-ply system, when combined with Elastoflex S6 base or interply sheets or other approved Polyglass base sheets.

### TYPICAL APPLICATIONS

- Superior cap sheet for multi-ply systems.
- New roofing, re-roofing and re-cover roofing and flashing details.
- Designed for hot asphalt, cold process or heat-welded installation methods.

### FEATURES AND BENEFITS

- High quality SBS compound for exceptional long-term weathering performance.
- Polyester reinforcement provides superior puncture and tear resistance.
- Flexibility and dimensional stability.

### TECHNICAL DESCRIPTION\*

Physical Properties	CSA A123.23-15, Type B, Grade 1	Typical Performance
Strain Energy @-18°C – kN/m (lbf/in), Min	3.0 [17]	9.1 [52] - MD 6.8 [39] - XMD
Strain Energy @23°C – kN/m (lbf/in) before heat cond, Min"	5.5 [31]	8.0 [46] - MD 5.7 [32] - XMD
Peak Load at -18°C [0°F] - kN/m (lbf/in), Min	Report Value**	22.4 [128] - MD 18.4 [105] - XMD
Elongation at Peak Load at -18°C [0°F] - (%), Min	Report Value**	47 - MD 72 - XMD
Peak Load at 23°C [73°F] - kN/m (lbf/in), Min	Report Value**	16.1 [92] - MD 10.9 [62] - XMD
Elongation at Peak Load at 23°C [73°F] - (%), Min	Report Value**	51 - MD 77 - XMD
Ultimate Elongation at 23°C [73°F] - (%) before heat cond, Min"	Report Value**	62 - MD 95 - XMD
Low Temperature Flexibility* – °C (°F), Max	-18 [0]	Pass
Dimensional Stability (%), Max	1.0	0.3
Compound Stability – °C (°F), Min	102 [215]	Pass
Resistance to Puncture – Pass/Fail	Pass	Pass
Granule Embedment – g (oz), Max	2.0 [0.07]	0.65 [0.02]

\*The properties in this table are "as manufactured" unless otherwise noted

\*\*Report Value: Shall be reported but has no minimum value

### AVAILABLE COLORS

Top surface granule protection is available in a variety of colors such as:

Black (BL)	Buff (BU)	Chestnut (CH)	Grey Slate (SL)
Oak (OA)	White (WH)	Red Blend (RB)	Pine Green (PG)
Heather Blend (HB)	Weatherwood (WWW)		

Copyright ©2023 by Polyglass U.S.A., Inc. and all rights are reserved.

Edition Date: 01/23 • Doc# Elastoflex S6 G (180) Mop




### PRODUCT DATA\*\*

Net Coverage (Approx) ..... 9.3 m<sup>2</sup> (100 ft<sup>2</sup>)  
 Weight (Approx) ..... 44 kg (97 lbs)  
 Thickness (Nominal) ..... 3.5 mm (140 mils)  
 Roll Size ..... 10 m x 1 m (32'10" x 39 3/8")  
 Rolls/Pallet ..... 20

\*\*All values are nominal at time of manufacturing

### APPLICABLE STANDARDS

- ASTM D6164
- UL Classified
- FM Approved
- ICC ESR-2018
- Florida Building Code
- Miami-Dade County Approved
- Texas Department of Insurance
- Tested According to CSA A123.23-15, Type B, Grade 1

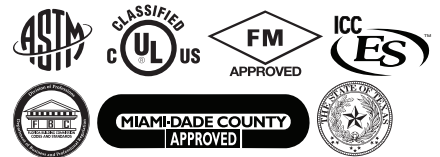

### PRODUCT CODES

- EP35##SC (Granule/Sand)
- ##denotes color code - see Available Colors

**POLYGLASS**



www.polyglass.us

# ELASTOFLEX S6 G (180) MOP

## SBS (ELASTOMERIC) GRANULATED CAP SHEET

### APPLICATION INSTRUCTIONS

Elastoflex S6 G is intended to be used as the primary weathering surface in new or re-roof applications. Elastoflex S6 G is to be applied as the uppermost layer of a multi-ply roof system applied over a compatible Polyglass base or interply membrane.

Elastoflex S6 G may be applied directly to certain noncombustible substrates.

- Apply over clean, dry, dust and debris-free substrates. When fully bonding, prime concrete decks and required substrates, prior to application with PG 100 Fast-Drying Asphalt Primer or alternative ASTM D41 primers as approved by Polyglass.
- When re-roofing, remove all prior roofing materials down to a clean debris-free substrate and properly close-off all abandoned roof penetrations.
- Concrete or steel decks shall be designed with proper expansion devices.
- Wood decks shall have all joints blocked and properly supported.
- Ensure the fire rating of the assembly over any combustible substrate.
- Ensure the installation of Elastoflex S6 G does not prevent the ventilation of existing construction.
- Do not apply over shingles or any granulated surface.
- While installing Elastoflex S6 G:
  1. Start at the low point of the roof.
  2. Unroll the material and allow to relax then re-roll the membrane once relaxed.
  3. Install in a solid mopping of Type III or Type IV asphalt, PG 350 Mod Bit Adhesive.
  4. Position successive rolls providing a minimum 6" end lap and 3" side lap.
  5. Matching loose granules may be sprinkled onto the bleed out.
- Details and flashing may be installed using hot asphalt or cold application techniques. Check project details for proper installation requirements.
- For detailed drawings and recommended installation procedures of typical roof segments, such as drip edge and T-joint conditions, please refer to our website at, [www.polyglass.ca](http://www.polyglass.ca)

### MANUFACTURING FACILITIES

- Fernley, NV
- Hazleton, PA
- Waco, TX
- Winter Haven, FL

### CORPORATE HEADQUARTERS

Polyglass U.S.A., Inc.

1111 West Newport Center Drive  
Deerfield Beach, FL 33442

[www.polyglass.ca](http://www.polyglass.ca)

General Line: (888) 410-1375  
(954) 233-1330

Customer Service: (800) 222-9782

Technical Service: (866) 794-9659

**Questions?** [technical@polyglass.com](mailto:technical@polyglass.com)

**Product Disclaimer:** Unless otherwise incorporated into or part of a supplemental manufacturer's warranty, Polyglass warrants its product(s) against manufacturing defects in its product that directly results in leakage for a period of 5 years.

Refer to safety data sheet (SDS) for specific data and handling of our products. All data furnished refers to standard production and is given in good faith within the applicable manufacturing and testing tolerances.

Polyglass U.S.A., Inc., reserves the right to improve and change its products at any time without prior notice. Polyglass U.S.A., Inc. cannot be held responsible for the use of its products under conditions beyond its own control. For most current product data and warranty information, visit [www.polyglass.ca](http://www.polyglass.ca)

**POLYGLASS**<sup>®</sup>



[www.polyglass.us](http://www.polyglass.us)