


## **POLYFORZA NAILER**

**FLUTE-FILL (PITCHED FLANGE)** 

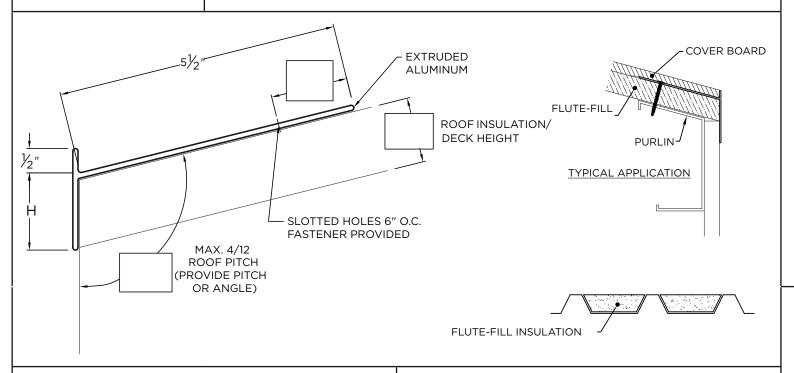

#### NOTES

- Fasteners provided will be insulation height plus 1" minimum. The substrate the fasteners are attaching to must be 22 ga. or greater. Typically fasteners are attached to purlin.
- Product should be installed per provided installation instructions

## **DIMENSIONS**

PRODUCT ID. NO.	H DIM	X DIM	
ELI-T-1555	1.5"	5.5"	
☐ ELI-T-3055	3"	5.5"	

# **ADDITIONAL INFO**

Please fill out the required info in the boxes located on the drawing above.

### **QUANTITIES**

Lineal Feet (12'-0" Lengths)

### **APPROVALS**





ANSI/SPRI/FM 4435/ES-1

Test Pressures listed in notes

$\mathbf{n}$	$\sim$	$\sim$ T	
uu			

Project Name:	
Architect:	
Roofing Contractor:	

Project Type:		

By selecting this box yo confirmed that dimensi are correct. All	ou have verified and ons, sizes, and quantities
products will be	1 . 1

products will be installed in strict accordance with printed instructions.

Date:	
-------	--

### Polyglass USA, Inc.

1111 W. Newport Center Dr. Deerfield Beach, FL 33442 Customer Service: 800-222-9782 Technical Service: 866-794-9659 SHT# 1 of 1

DATE: 02/03/22

DRN BY: \_\_\_\_\_JJC

CKD BY: MM

DWG #: 45018-37597

REV: A